
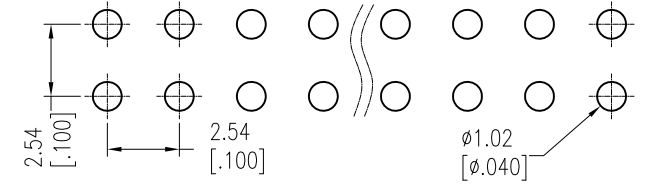


# HSF

NOTES:  
 Rated Current:3.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

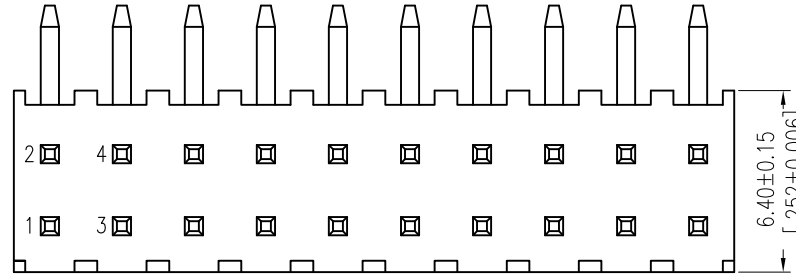

## Ordering Information

1174-12 XX XX R XXX C 0 XX

No. of Pins Per Row:02-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length(Short) L=A+B+5.6 Standard:146=14.6	Insulator Material C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01-99
------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------	---------------------------------	-------------------------------	---------------------

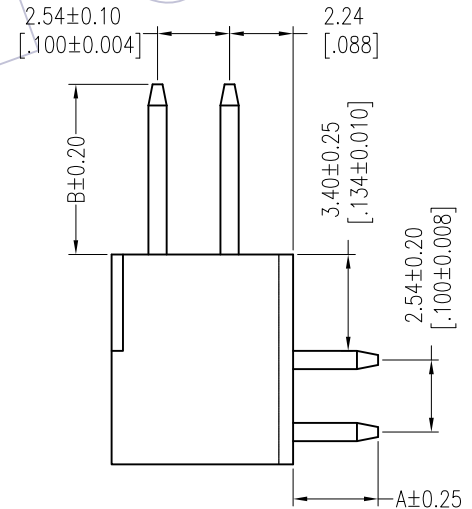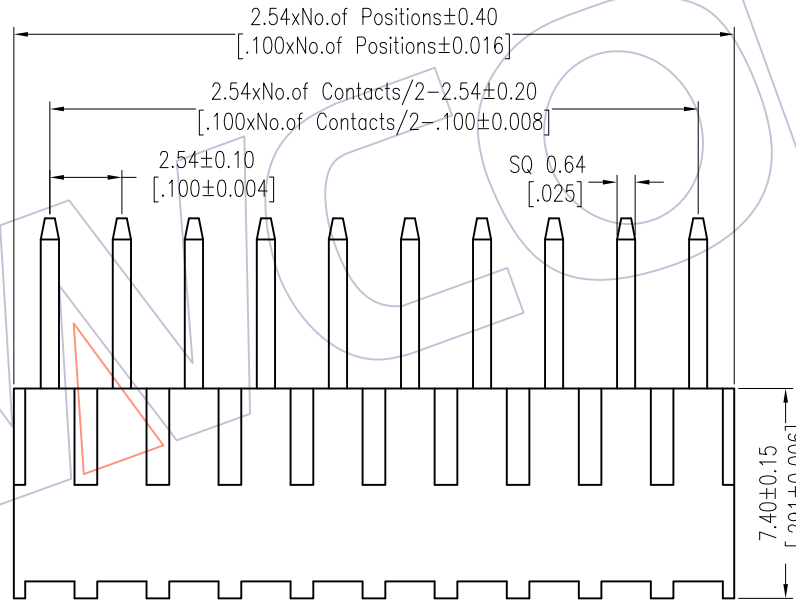

Item	Pin Length	A	B
Standard	14.60	3.00	6.00
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2018/01/22	Modify P/N		OPERATION	DRAW	2018/01/22	UNIT	mm	1174-12XXXXRXXXCOXX
A2	2013/03/01	Modify The Material		x.x ±0.40	Ruipeng		SIZE	A4	TITLE:
A1	2012/12/13	Add PBT Material		x.xx ±0.25	CHECK		SHEET	1/1	PH2.54 DUAL ROW 90°H=7.4
A0	2012/05/08	NEW	-----	x.xxx ±0.15	APPROVE		PROJ.		Customer NO.
				Angle ± 3'					
				DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
-------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------