
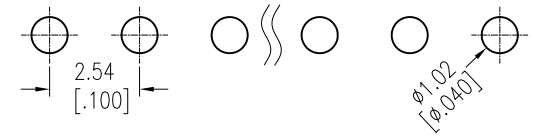




# HSF

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE±0.05)

NOTES:  
Rated Current:3.0AMP.  
Contact Resistance:20mΩ Max.  
Withstand Voltage:1000V AC/DC  
Insulation Resistance:1000MΩ Min.  
Operation Temperature:-40°C to +105°C



Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:PA9T+33%G.F UL94V-0 BK

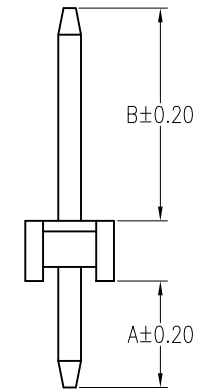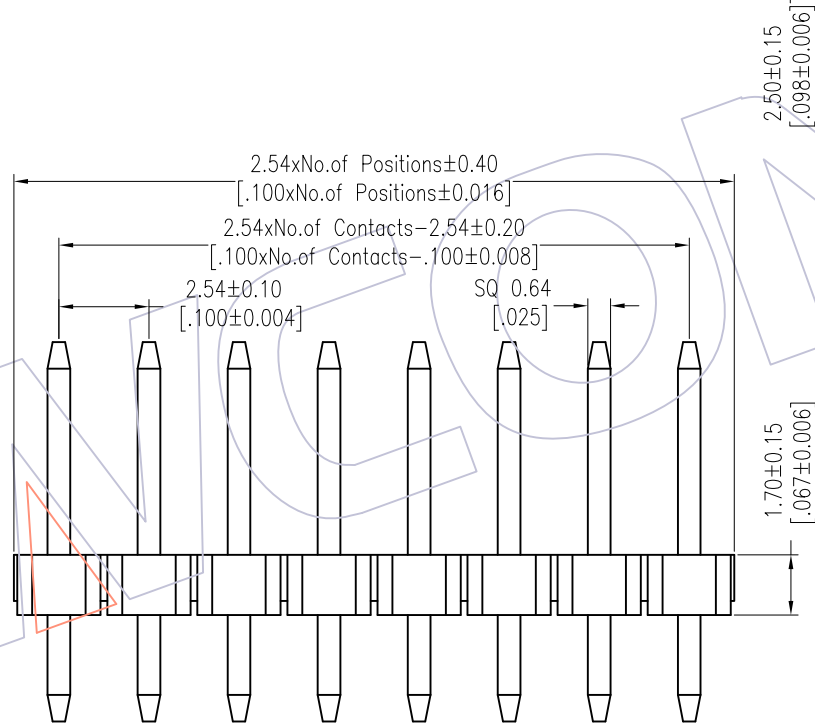

## Ordering Information

1117-11 XX XX S XXX C 0 XX  $\triangle A1$

No.of Pins	Contact Plating	Pin Length	Insulator Material	Packing	Series No.
02-40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold	L=A+B+1.7 Standard:107=10.7	C=PA9T D=LCP	0=PE Bag T=Tube	01~99
S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin					
SN=Tin SM=Matte Tin					

Item	Pin Length	A	B	Mating
Standard	10.70	3.00	6.00	2171 2185
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.x ±0.40	Ruipeng	2018/01/22	UNIT	mm	1117-11XXXXSXXXCOXX
A1	2018/01/22	Modify P/N	$\triangle A1$	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/05/04	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	PH2.54 SINGLE ROW 180° H=1.7
				Angle ± 3'			PROJ.	$\phi$	Customer NO.
				DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--