






HSF

NOTES:

Rated Current:0.75AMP.
 Contact Resistance:30mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

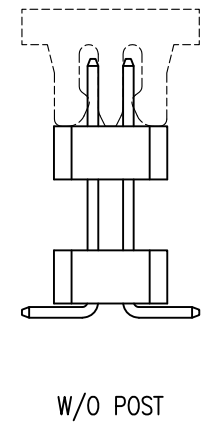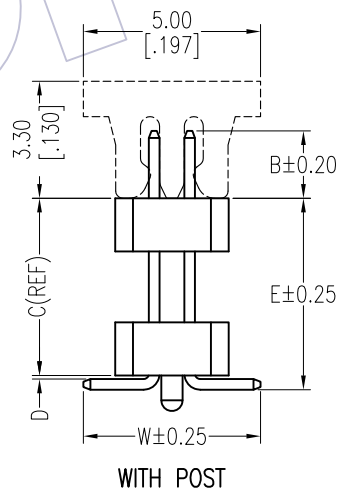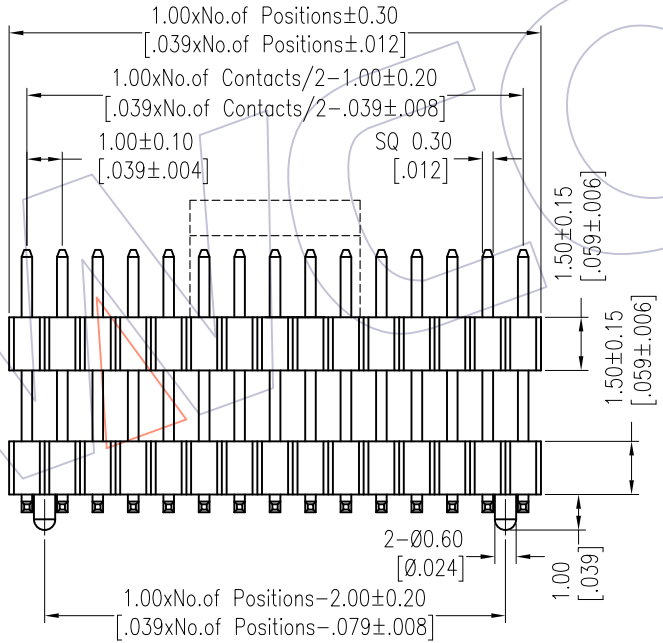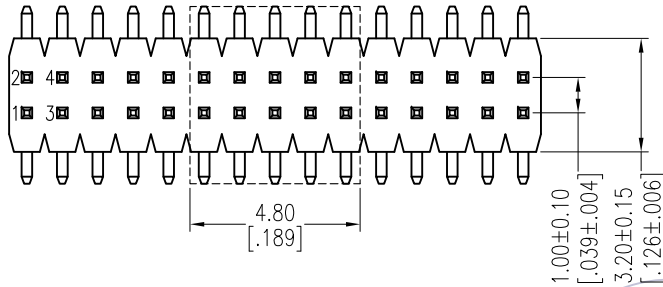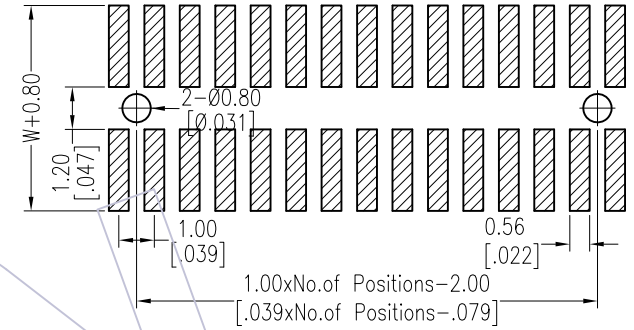

Ordering Information

1515-22 XX XX M XXX C X XX

No. of Pins Per Row:02-50
 Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold SN=Tin SM=Matte Tin
 Pin Length L=B+C+D+W/2
 Insulator C=PA9T
 Series No. 01-99
 Packing T=Tube P=Tube+CAP R=Tape&Reel+CAP

Item	Pin Length	W	D	B	E
Standard	--	5.00	0.10	1.90	--
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/05	MODIFY PART NO.	-----	x.X ±0.40	William Chen	2018/01/05	UNIT	mm [inch]	1515-22XXXXMXXXCXXX
A1	2012/11/20	Modify the material	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.00 Pin Header, DUAL ROW, DOUBLE PLASTIC, SMT, H=1.5
A0	2012/03/01	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com