





# HSF

**NOTES:**

Rated Current:0.75AMP.  
 Contact Resistance:30mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

**Recommended P.C.B Layout (Top Side)**  
 (PCB BOARD TOLERANCE±0.05)

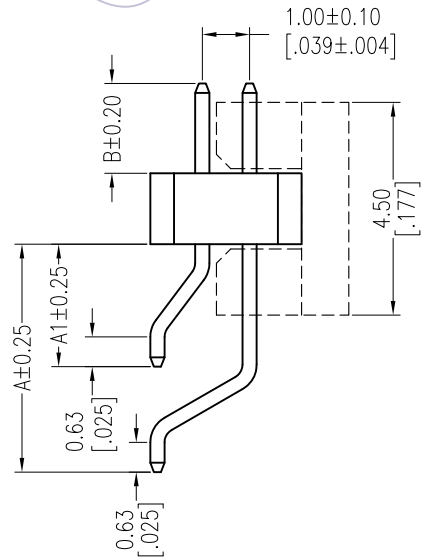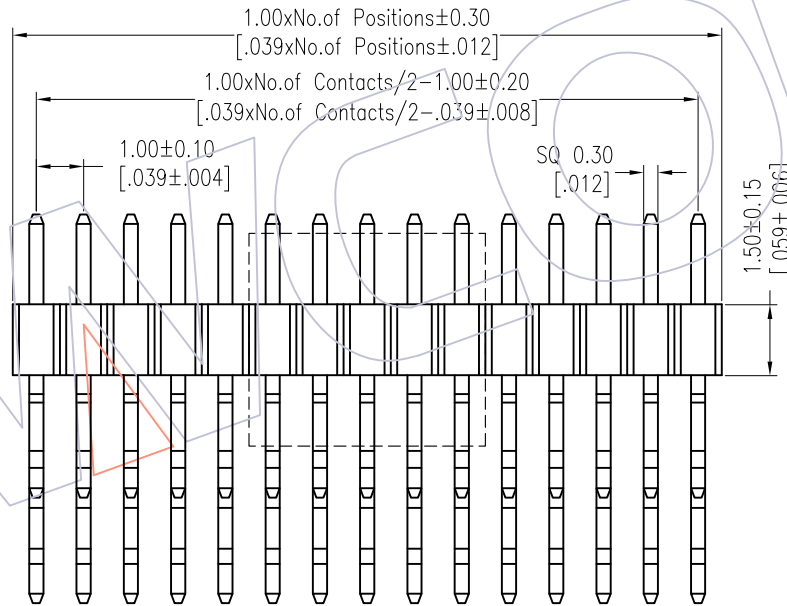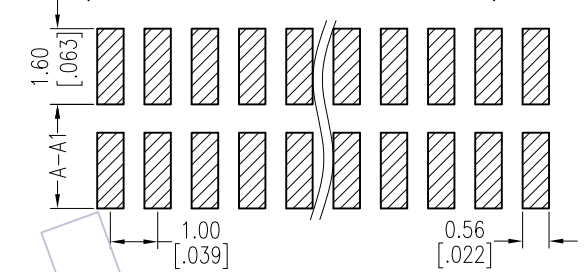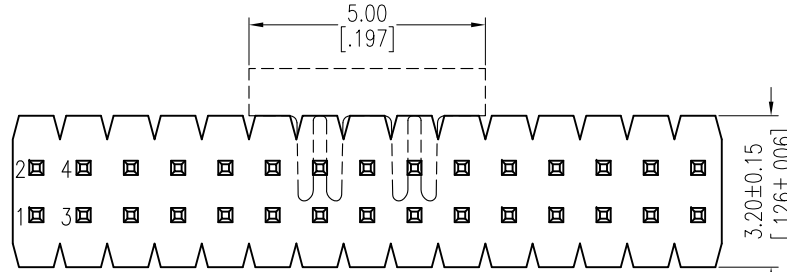

## Ordering Information

1515-12 XX XX Z 062 C R XX

No. of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row:01~50	G0=Gold Flash	L=A1+B+1.8	C=PA9T	A=Tray	01~99
	G3=10u"Gold	Standard:062=6.2		T=Tube	
	G4=15u"Gold			P=Tube+CAP	
	G5=30u"Gold			R=Tape&Reel+CAP	
	SN=Tin				
	SM=Matte Tin				

Item	Pin Length	A1	A	B
Standard	6.2	2.59	4.82	1.90
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/05	MODIFY PART NO.	-----	x.X ±0.40	William Chen	2018/01/05	UNIT	mm [inch]	1515-12XXXXXXCXXX
A1	2012/11/21	Modify the material	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/03/01	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.00 Pin Header, DUAL ROW, R/A&SMT, H=1.5
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--