

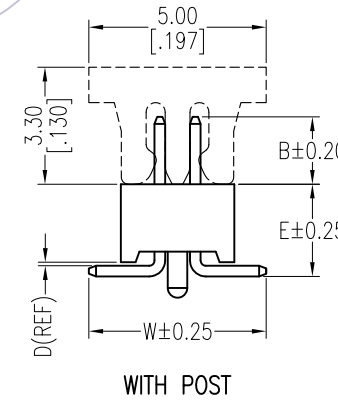
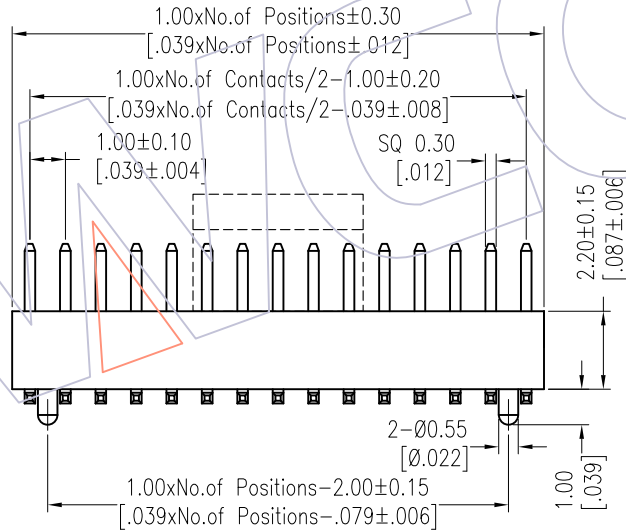
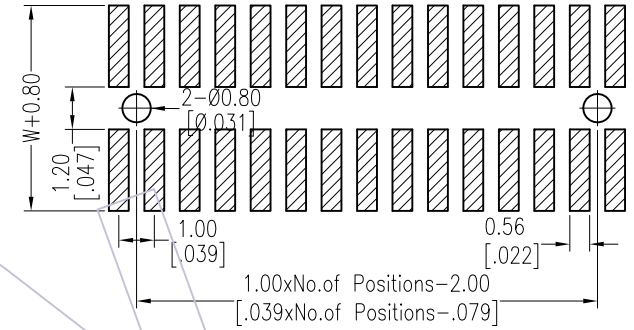


# HSF

NOTES:  
 Rated Current:0.75AMP.  
 Contact Resistance:30mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

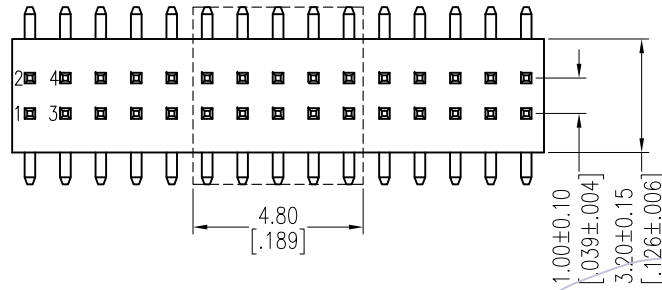

## Ordering Information

1522-12 XX XX M 062 C R XX

No. of Pins    Contact Plating    Pin Length    Insulator    Series No.  
 Per Row:02-50    G0=Gold Flash    L=B+D+2.2+ $\frac{W}{2}$ ±0    C=PA9T    01-99

G3=10u"Gold    Standard:062=6.2  
 G4=15u"Gold  
 G5=30u"Gold  
 SN=Tin  
 SM=Matte Tin

Packing  
 T=Tube  
 P=Tube+CAP  
 R=Tape&Reel+CAP

Item	Pin Length	W	E	B
Standard	6.2	5.00	2.60	1.90
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/05	MODIFY PART NO.	-----	x.X    ±0.40	William Chen	2018/01/05	UNIT	mm [inch]	1522-12XXXXMXXCX XX $\Delta$
A1	2012/11/21	Modify the material	-----	x.XX    ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.00 Pin Header, DUAL ROW, SMT, H=2.2
A0	2012/03/01	NEW	-----	x.XXX    ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle    ± 3'			PROJ.		
				DIM    TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan    WCON-Kunshan  
 Tel: +86 769 85358920    Tel: +86 512 57468408  
 Fax: +86 769 85358915    Fax: +86 512 57468468  
 E-mail: sales@wcon.com    E-mail: salesks@wcon.com