






HSF

NOTES:

Rated Current:0.75AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

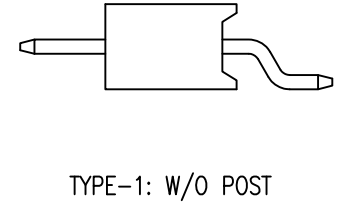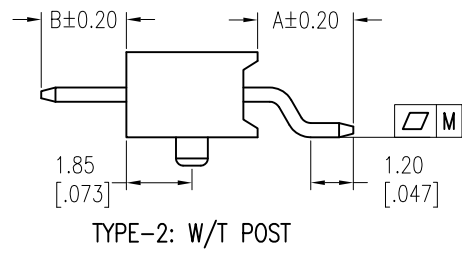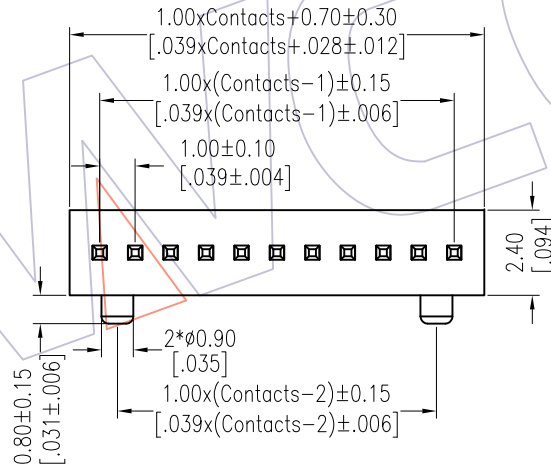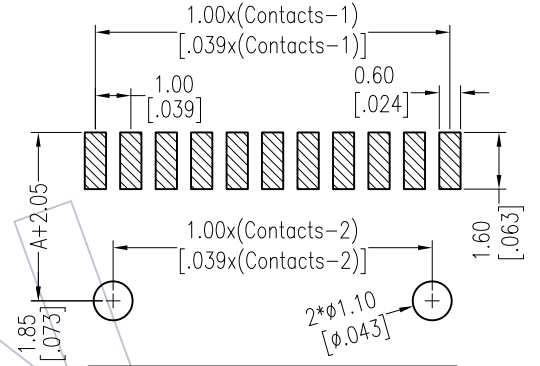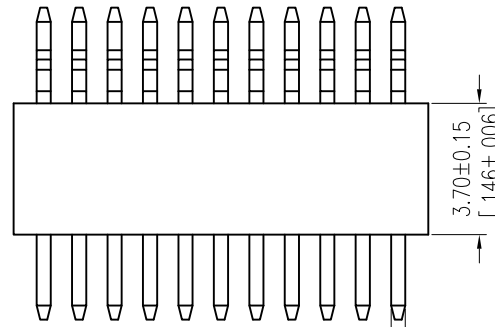

Ordering Information
1537-11 XX XX Z 091 C R XX

No. of Pins: 02-50
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, SN=Tin, SM=Matte Tin
 Pin Length: L=A+B+4.0, Std:091=9.1
 Insulator: C=PA9T
 Packing Series No.: A=Tray 01-99, R=Tape&Reel

Item	Pin Length	A	B
Standard	9.1	2.70	2.40
Alternate			

No. of Pins	M
≤15	0.12
>15	0.15

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/05	MODIFY PART NO.	-----	x.X ±0.40	William Chen	2018/01/05	UNIT	mm [inch]	1537-11XXXXXXXCXXX
A0	2013/08/19	NEW	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.00 Pin Header, SINGLE ROW, R/A&SMT, H=3.7
				x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com