

HSF

NOTES:

Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C


Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Ordering Information




1325-22 XX XX S XXX C A XX

No. of Pins Contact Plating Pin Length Insulator Packing Series No.
 Per Row:02-50 G0=Gold Flash L=A+B+C C=PA9T A=Tray 01-99
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin
 SM=Matte Tin

| Item | Pin Length | A | B | C | Mating |
|-----------|------------|------|------|----|--------|
| Standard | -- | 1.80 | 1.90 | -- | 2321 |
| | -- | 1.80 | 3.00 | -- | 2334 |
| | -- | 1.80 | 4.00 | -- | 2344 |
| Alternate | | | | | |

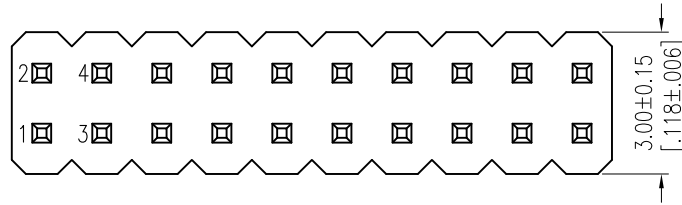

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

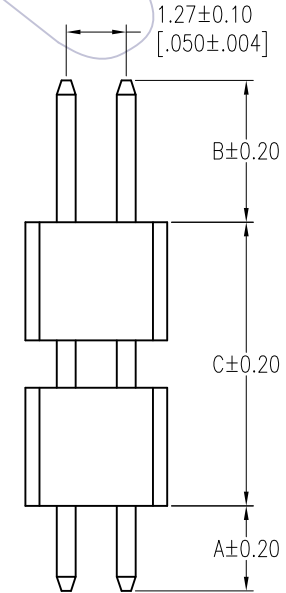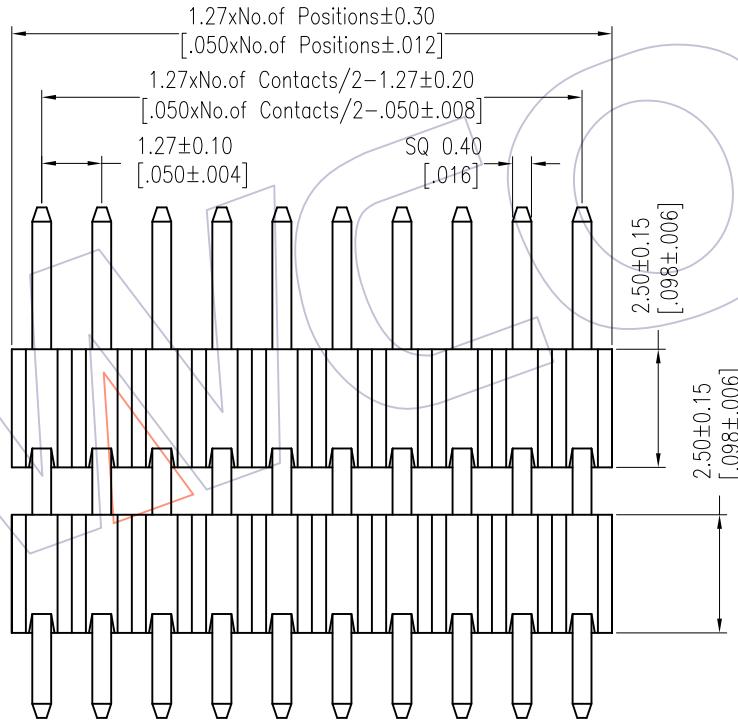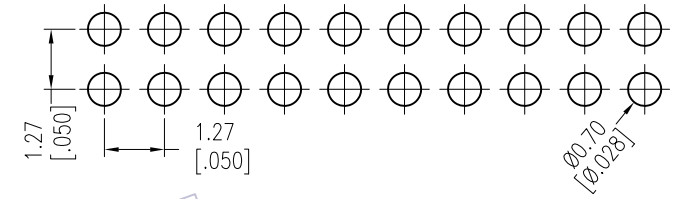

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | Fit | PART NO. |
|-----|------------|--------------------------|--------|-------------|--------------|------------|-------|--------------|---|
| | | | | x.X ±0.40 | William Chen | 2018/01/18 | UNIT | mm [inch] | 1325-22XXXXXXCXXX |
| A1 | 2018/01/18 | MODIFY PART NO. | ----- | x.XX ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: |
| AO | 2012/03/31 | NEW | ----- | x.XXX ±0.15 | APPROVE | DATE | SHEET | 1/1 | 1.27 Pin Header, DUAL ROW, S/T, DOUBLE PLASTIC, H=2.5 |
| | | | | Angle ± 3' | | | PROJ. | Customer NO. | |
| | | | | DIM TOL | | | | | |

WCON

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com