



HSF

NOTES:

Rated Current: 1.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105 °C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-O BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

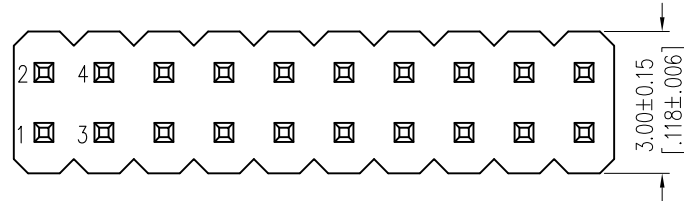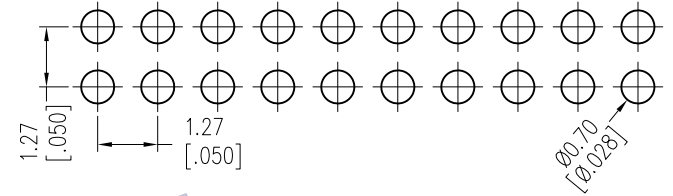

Ordering Information

1325-12 XX XX S XXX C A XX

No. of Pins Per Row: 02~50	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length L=A+B+2.5 Std: 062=6.2 073=7.3 083=8.3	Insulator C=PA9T	Packing A=Tray	Series No. 01-99
-------------------------------	---	---	---------------------	-------------------	---------------------

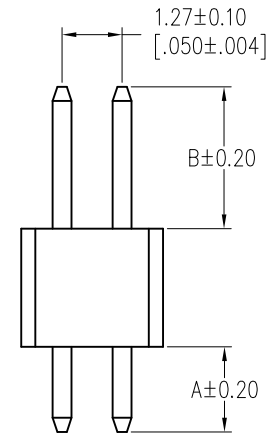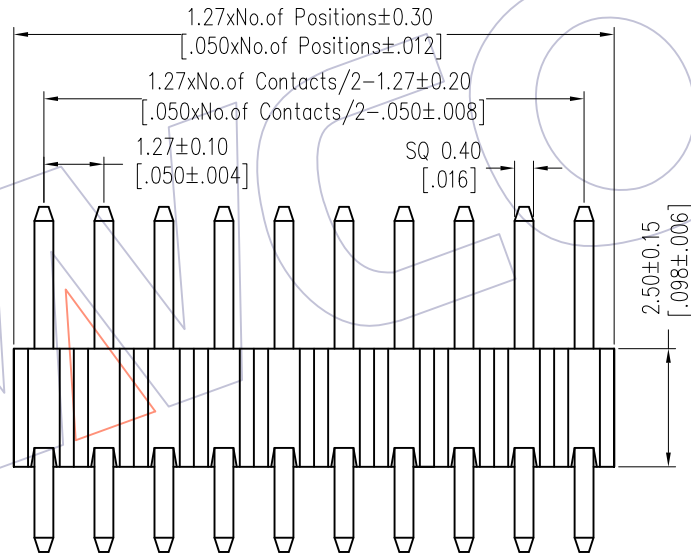

Item	Pin Length	A	B	Mating
Standard	6.2	1.80	1.90	2321
	7.3	1.80	3.00	2334
	8.3	1.80	4.00	2344
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/18	MODIFY PART NO.	-----	x.x ±0.40	William Chen	2018/01/18	UNIT	mm [inch]	1325-12XXXXXXXCXXX
A0	2012/03/31	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	1.27 Pin Header, DUAL ROW, S/T, H=2.5
				Angle ± 3'			PROJ.	⌀	Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--