
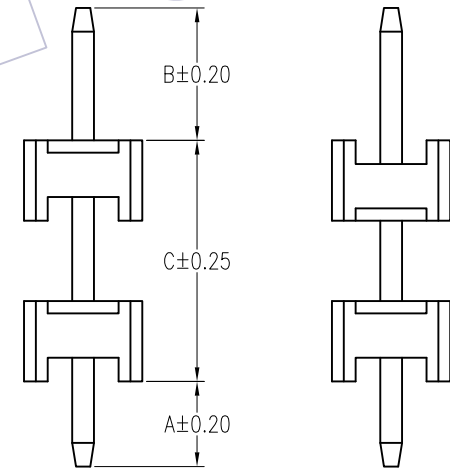

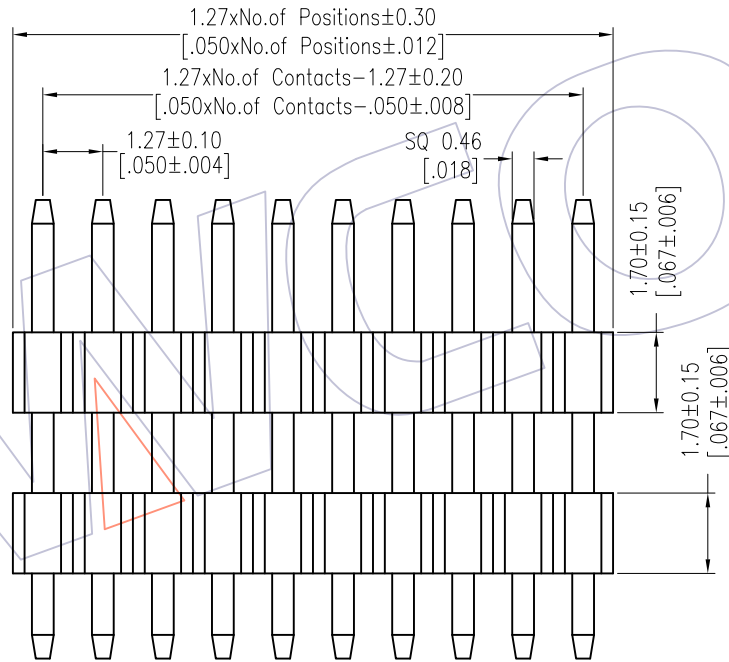
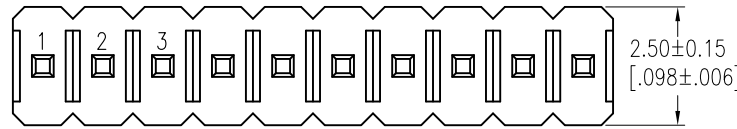


# HSF

NOTES:  
 Rated Current:1.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

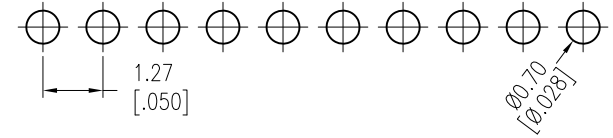

TYPE-1

TYPE-2

## Ordering Information

1317-21 XX XX S XXX C A XX

No. of Pins    Contact Plating    Pin Length    Insulator    Packing    Series No.  
 01~50    G0=Gold Flash    L=A+B+C    C=PA9T    A=Tray    01~99  
 G3=10u"Gold  
 G4=15u"Gold  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 SN=Tin  
 SM=Matte Tin

|           | Pin Length | A    | B    | C  | Mating |
|-----------|------------|------|------|----|--------|
| Standard  | --         | 1.80 | 2.80 | -- | 2346   |
|           | --         | 1.80 | 6.00 | -- | 2385   |
| Alternate |            |      |      |    |        |

| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE | OPERATION   | DRAW         | DATE       | SCALE | Fit          | PART NO.  |
|-----|------------|--------------------------|--------|-------------|--------------|------------|-------|--------------|---|
|     |            |                          |        | x.X ±0.40   | William Chen | 2018/01/17 | UNIT  | mm [inch]    | 1317-21XXXXXXCXXX                                       |
| A1  | 2018/01/17 | MODIFY PART NO.          | -----  | x.XX ±0.25  | CHECK        | DATE       | SIZE  | A4           | TITLE:  |
| AO  | 2012/03/16 | NEW                      | -----  | x.XXX ±0.15 | APPROVE      | DATE       | SHEET | 1/1          | 1.27 Pin Header, SINGLE ROW, S/T, DOUBLE PLASTIC, H=1.7 |
|     |            |                          |        | Angle ± 3'  |              |            | PROJ. | Customer NO. |   |
|     |            |                          |        | DIM TOL     |              |            |       |              |   |



Http: www.wcon.com

|   |  |
|---|--|
| WCON-Dongguan<br>Tel: +86 769 85358920<br>Fax: +86 769 85358915<br>E-mail: sales@wcon.com | WCON-Kunshan<br>Tel: +86 512 57468408<br>Fax: +86 512 57468468<br>E-mail: salesks@wcon.com |
|---|--|