HSF

NOTES:
Rated Current:1.0AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+33%G.F UL94V−0 BK

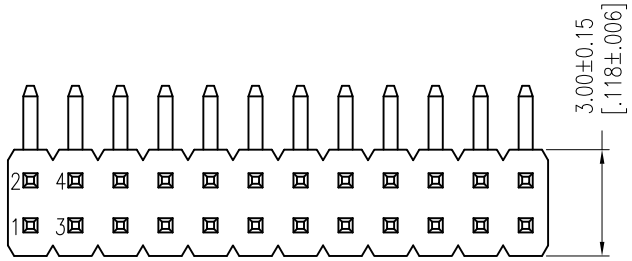

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

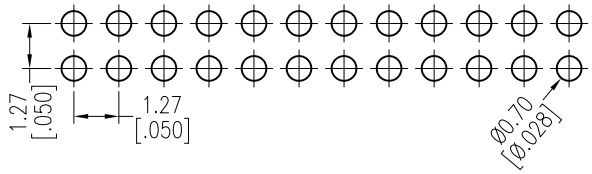

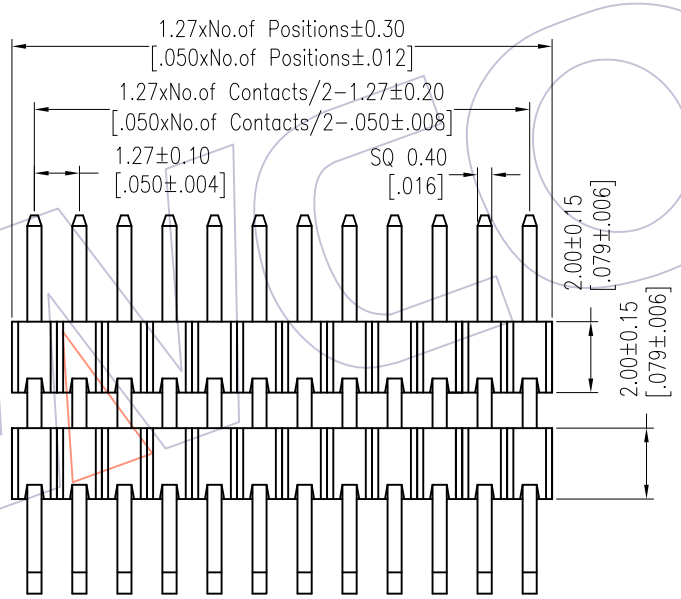

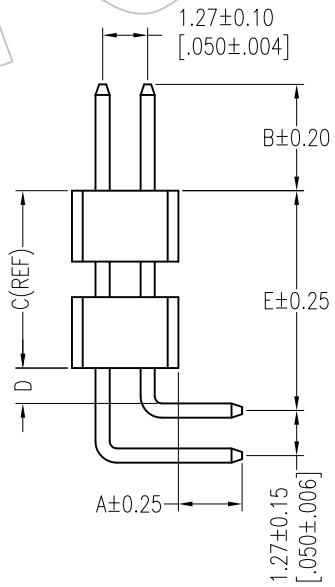

Ordering Information

1320-22 XX XX R XXX C A XX

No.of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row:01~50	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	L=A+B+C+D+0.8	C=PA9T	A=Tray	01~99

Item	Pin Length	A	D	B	E	Mating
Standard	--	1.80	1.00	1.90	--	2321
	--	1.80	1.00	3.00	--	2334
	--	1.80	1.00	4.00	--	2344
Alternate						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018/01/17	MODIFY PART NO.	------
A0	2012/03/22	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	William Chen	DATE	2018/01/17
CHECK		DATE	
APPROVE		DATE	

SCALE	Fit
UNIT	mm [inch]
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 1320−22XXXXRXXXCXXX A1

TITLE: 1.27 Pin Header, DUAL ROW, R/A, DOUBLE PLASTIC, CONCAVE BENDING, H=2.0

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E−mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E−mail: salesks@wcon.com