



HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Rated Current:7.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C



Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:LCP+30%G.F UL94V-0 BK

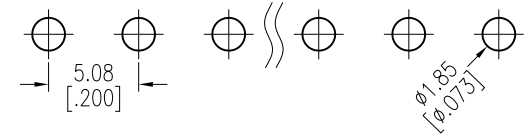

Ordering Information

1925-11 XX XX S XXX D 0 XX

No.of Pins	Contact Plating	Pin Length	Insulator Packing	Series No.
01~20	G0=Gold Flash SN=Tin SM=Matte Tin	L=A+B+2.5 Std:14.0	D=LCP 0=PE Bag	01~99

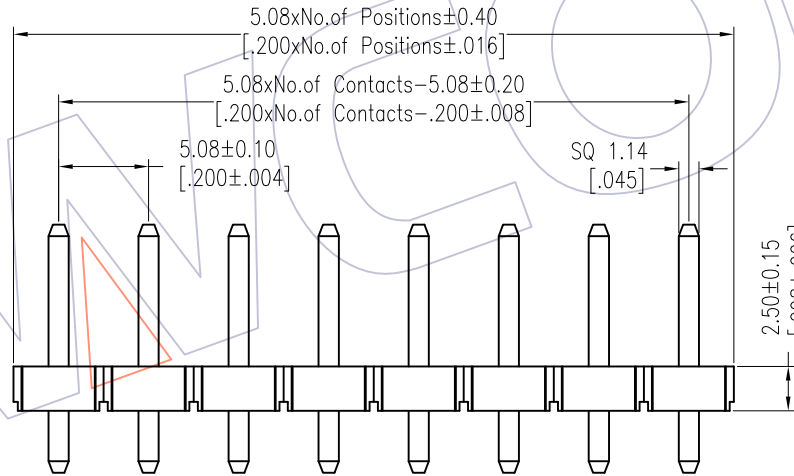

Item	Pin Length	A	B	Mating
Standard	14.0	3.50	8.00	2989
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/26	MODIFY PART NO.	-----	x.X ±0.40	William Chen	2018/01/26	UNIT	mm [inch]	1925-11XXXXXXXDXXX
A1	2013/01/08	MODIFY	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/07/03	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	5.08 Pin Header, SINGLE ROW, S/T, H=2.5
				Angle ± 3'			PROJ.	☉	Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--