
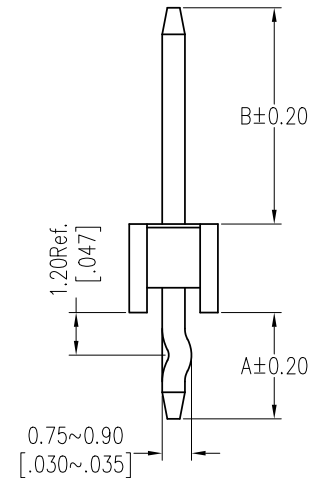
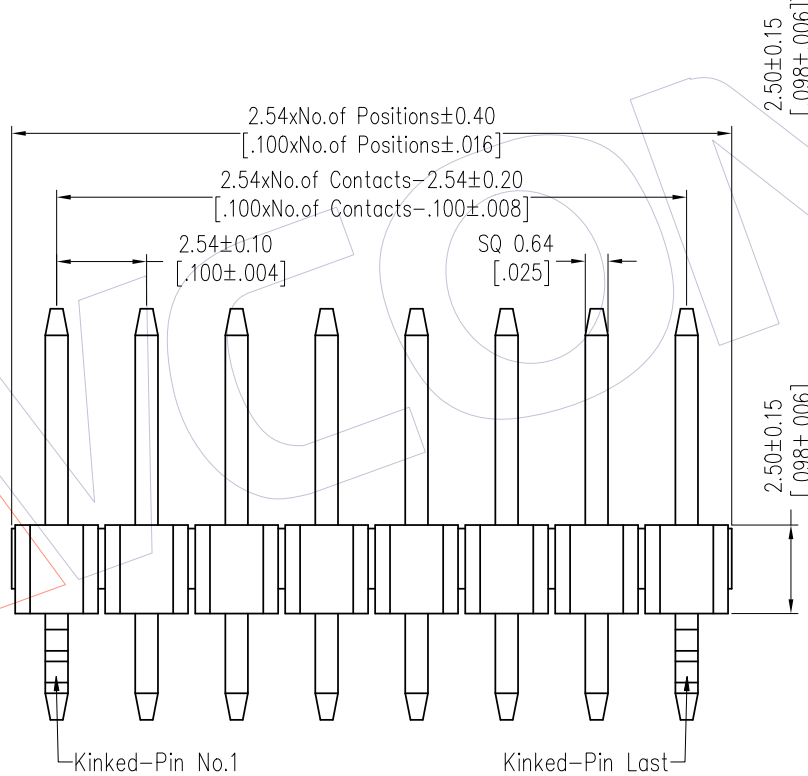
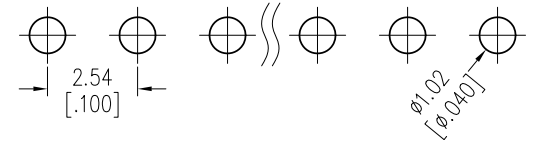


# HSF

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE±0.05)

NOTES:  
 Rated Current: 3.0AMP.  
 Contact Resistance: 20mΩ Max.  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min.  
 Operation Temperature: -40℃ to +105℃  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PA9T+33%G.F UL94V-0 BK



## Ordering Information

1125-11 XX XX K XXX C 0 XX

No. of Pins	Contact Plating	Pin Length	Insulator Material	Packing	Series No.
02-40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	L=A+B+2.5 Standard:085=8.5 095=9.5 105=10.5 116=11.6 118=11.8 135=13.5	C=PA9T	0=PE Bag T=Tube	01-99

Item	Pin Length	A	B	Mating
Standard	8.50	3.00	3.00	2135
	9.50	3.00	4.00	2145
	10.50	3.00	5.00	2150
	11.60	3.00	6.10	2171 2185
	11.80	2.40	6.90	2171 2185
Alternate	13.50	3.00	8.00	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2018/06/02	Cancel PBT & Modify P/N	-----	x.x	±0.40	OPERATION	DRAW	2018/06/02	UNIT	mm [inch]	1125-11XXXXKXXXCOXX
A2	2018/01/22	Modify P/N	-----	x.xx	±0.25		Surong Xu		SIZE	A4	TITLE:
A1	2016/02/19	MODIFY DRAWING	-----	x.xxx	±0.15		CHECK		SHEET	1/1	PH2.54 SINGLE ROW S/T H=2.5 Kinked-PIN
A0	2012/05/17	NEW	-----	Angle	± 3°	APPROVE			PROJ.		Customer NO.

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--