





HSF

NOTES:

Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

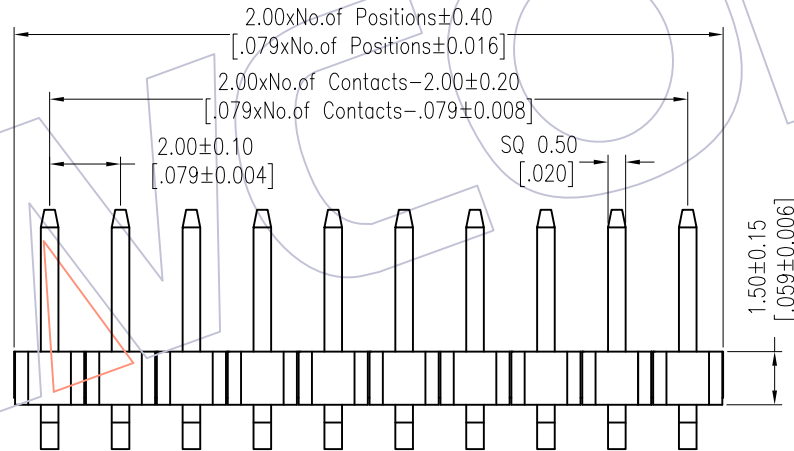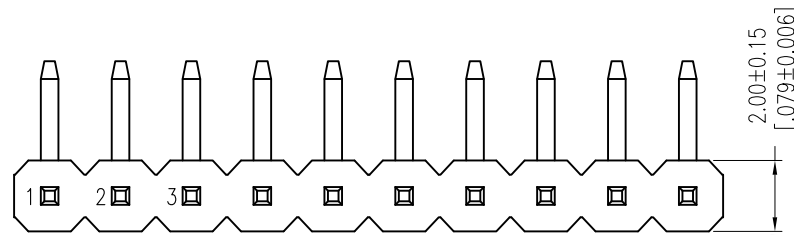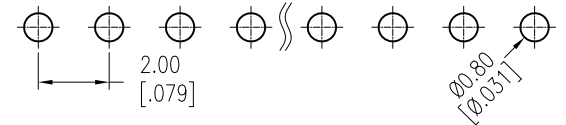

Ordering Information

1215-11 XX XX R XXX C 0 XX

| | | | | | |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-----------------|--------------------|------------|
| No.of Pins | Contact Plating | Pin Length | Insulator | Packing | Series No. |
| 02~50 | G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin | L=A+B+D+2.5 Standard:100=10.0 | Material C=PA9T | 0=PE Bag T=Tube | 01~99 |

| Item | Pin Length | A | E | B | Mating |
|-----------|------------|------|------|------|---------------------|
| Standard | 10.00 | 2.80 | 2.50 | 4.00 | 2240 2243 2263 2272 |
| Alternate | | | | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | Fit | PART NO. |
|-----|------------|--------------------------|--------|-------------|------------|------------|-------|-----|----------------------------------------------------------|
| | | | | x.X ±0.40 | <i>Liu</i> | 2018.01.18 | UNIT | mm | 1215-11XXXXRXXXCOXX |
| A1 | 2018/01/18 | Modify P/N | | x.xx ±0.25 | CHECK | DATE | SHEET | A4 | TITLE: PH2.00 SINGLE ROW 90° H=1.5 CONCAVE BENDING |
| AO | 2012/04/18 | NEW | ----- | x.xxx ±0.15 | APPROVE | DATE | PROJ. | 1/1 | Customer NO. |
| | | | | Angle ± 3' | | | | | |
| | | | | DIM TOL | | | | | |

WCON

Http: www.wcon.com

| | |
|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com | WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com |
|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|