




# HSF

**NOTES:**

Rated Current:2.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

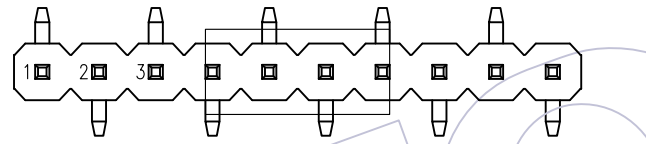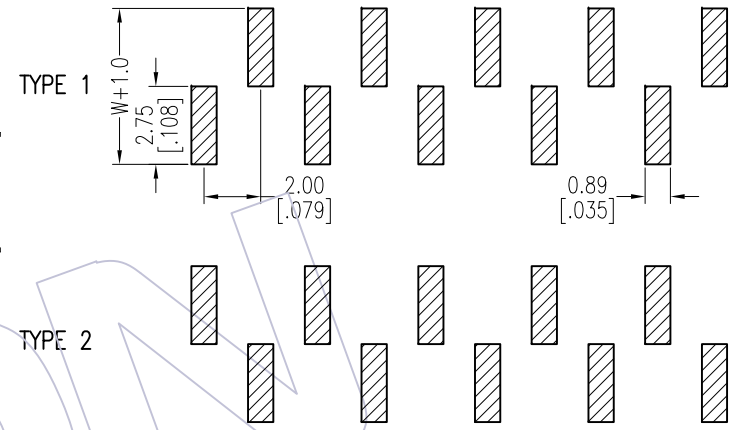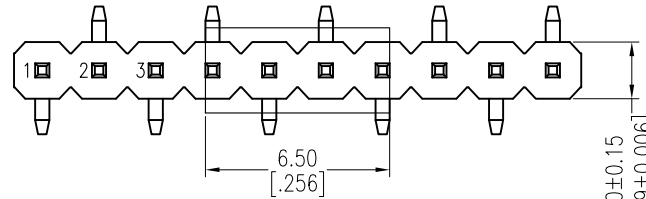

## Ordering Information

1215-11 XX XX M XXX C R XX

No. of Pins	Contact Plating	Pin Length	Insulator Material	Packing	Series No.
02-50	G0=Gold Flash	L=B+D+1.5+ $\frac{W}{2}$	T=Tube	T=Tube	01-99
	G3=10u"Gold	Standard:058=5.8	C=PA9T	P=Tube+CAP	
	G4=15u"Gold	068=6.8		R=Tape&Reel+CAP	
	G5=30u"Gold	078=7.8			
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

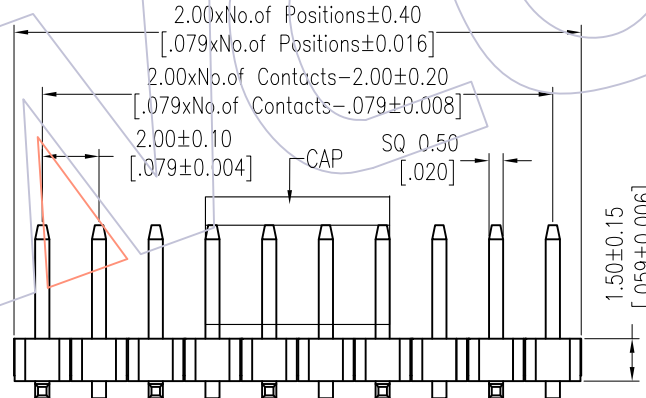

Item	Pin Length	W	E	B	Mating
Standard	5.80	4.50	2.10	2.00	2220T 2221 2227T 2228
	6.80	4.50	2.10	3.00	2235
	7.80	4.50	2.10	4.00	2240 2243 2263 2272
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/18	Modify P/N		x.X ±0.40	<i>Liu</i>	2018.01.18	UNIT	mm	1215-11XXXXMXXCRXX
AO	2012/04/18	NEW	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.00 SINGLE ROW SMT H=1.5
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: <a href="mailto:sales@wcon.com">sales@wcon.com</a>	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: <a href="mailto:salesks@wcon.com">salesks@wcon.com</a>
---	--