


HSF


NOTES:

Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

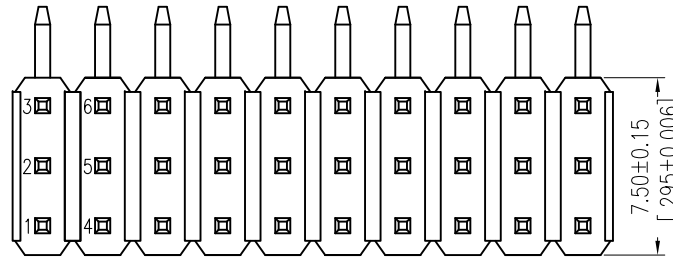



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

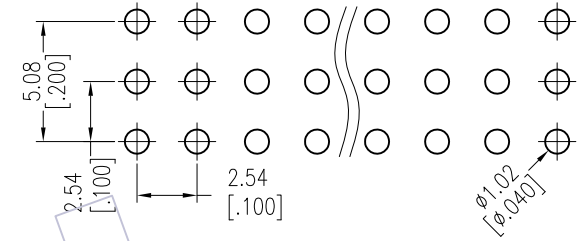

Ordering Information

1125-13 XX XX R XXX C 0 XX Δ_{A2}

| | | | | | |
|-----------------------------|---|---|---------------------------------|-------------------------------|---------------------|
| No.of Pins Per Row:03-40 | Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin | Pin Length(Short) L=A+B+D+3.7 Standard:139=13.9 | Insulator Material C=PA9T | Packing 0=PE Bag T=Tube | Series No. 01-99 |
|-----------------------------|---|---|---------------------------------|-------------------------------|---------------------|

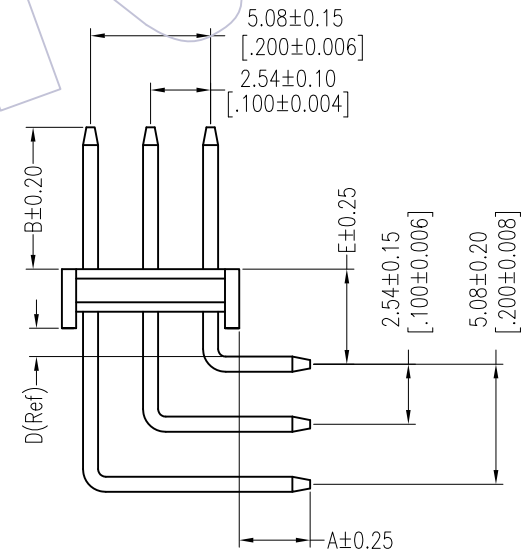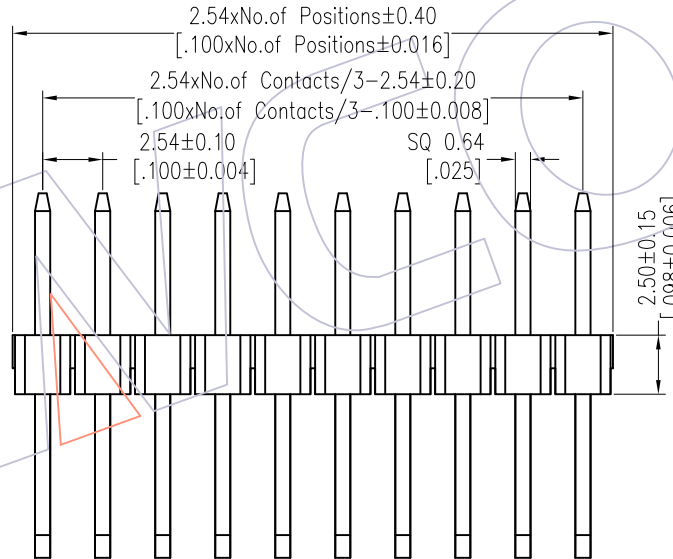

| Item | Pin Length | A | E | B | Mating |
|-----------|------------|------|------|------|--------|
| Standard | 13.90 | 3.00 | 4.02 | 6.00 | 2185 |
| Alternate | | | | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | Fit | PART NO. |
|-----|------------|--------------------------|---------------|-------------|---------|------------|-------|-----------|--|
| A2 | 2018/01/22 | Modify P/N | Δ_{A2} | X.X ±0.40 | Ruipeng | 2018/01/22 | UNIT | mm [inch] | 1125-13XXXXRXXXCOXX |
| A1 | 2013/02/28 | Modify Drawing | ----- | X.XX ±0.25 | CHECK | DATE | SIZE | A4 | TITLE: PH2.54 THREE ROW 90° CONCAVE BENDING H=2.5 |
| A0 | 2012/06/16 | NEW | ----- | X.XXX ±0.15 | APPROVE | DATE | SHEET | 1/1 | Customer NO. |
| | | | | Angle ± 3' | | | PROJ. | | |
| | | | | DIM TOL | | | | | |

WCON
 Http: www.wcon.com

| | |
|---|--|
| WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com | WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com |
|---|--|