
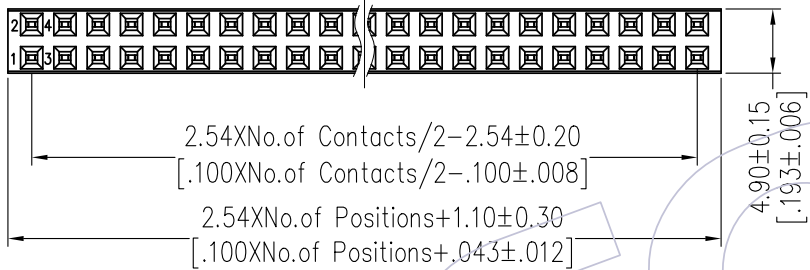


HSF

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

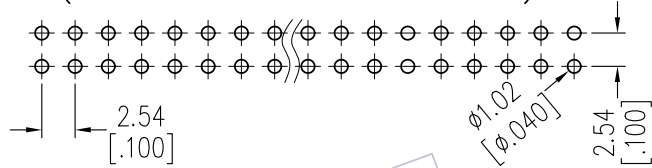


Contact Plating	Test Point M	Test Point N
G1	3U" Au	1U" Au
G3	10U" Au	1U" Au
G4	15U" Au	1U" Au
S1	3U" Au	Sn: 100u"
S3	10U" Au	Sn: 100u"
S4	15U" Au	Sn: 100u"

Ordering Information

2111A - 2 XX S XX A Y N X

No. of Pins per ROW: 02-40PIN
 Contact Plating:
 G1=3u" Gold
 G3=10u" Gold
 G4=15u" Gold
 S1=Sel. 3u" Gold/Tin
 S3=Sel. 10u" Gold/Tin
 S4=Sel. 15u" Gold/Tin

Packing:
 T=Tube
 A=Tray
 P=Tube+Cap

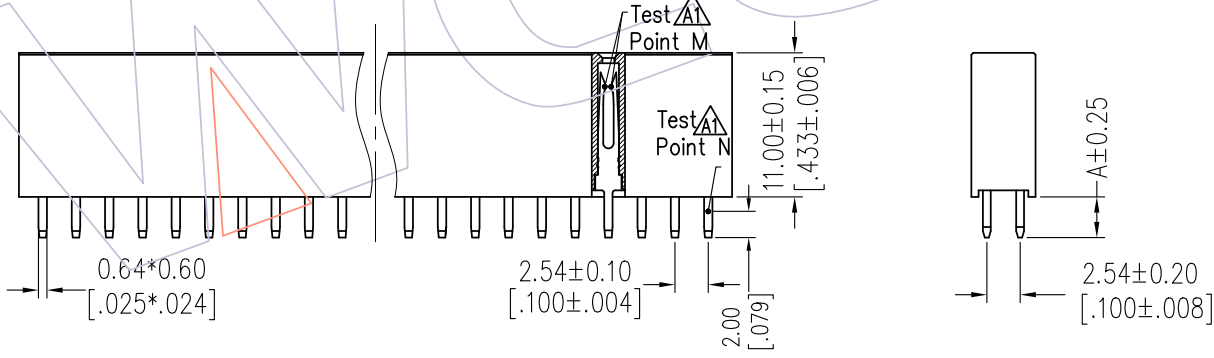

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

Dimension antitheses list	
ITEM	A
Standard	3.10
Alternate	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW XSR	DATE	SCALE	FIT	PART NO.
				DIM	TOL					
A1	2020/01/17	MODIFY	-----	x.x	±0.40	CHECK	2020/01/17	UNIT	mm	2111A-2XXSXXAYNX1
A0	2012/08/02	NEW	-----	x.xx	±0.25	APPROVE		SIZE	A4	TITLE: 2.54mm Female Header DUAL ROW 180°DIP H=11.0
				Angle	± 3'			SHEET	1/1	Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
---	--