

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃ to +105℃
 Contact Material: Copper Alloy
 Contact Plating: Au Over Ni
 Insulator Material: High Temperature Thermoplastic(UL94V-0)

Ordering Information

2293 - 4 XX S XX CYNT 2




No. of Pins per ROW: 02-40PIN
 Contact Plating: G1=Fully 3μ"Gold
 G3=Fully 10μ"Gold
 G4=Fully 15μ"Gold
 H3=Mating 10μ"Gold Tail 3μ"Gold
 H4=Mating 15μ"Gold Tail 3μ"Gold
 Insulator C=PA9T
 Packing: T=Tube



Contact Plating	Gold Test Point M	Gold Test Point N
G1	3U"	3U"
G3	10U"	10U"
G4	15U"	15U"
H3	10U"	3U"
H4	15U"	3U"

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

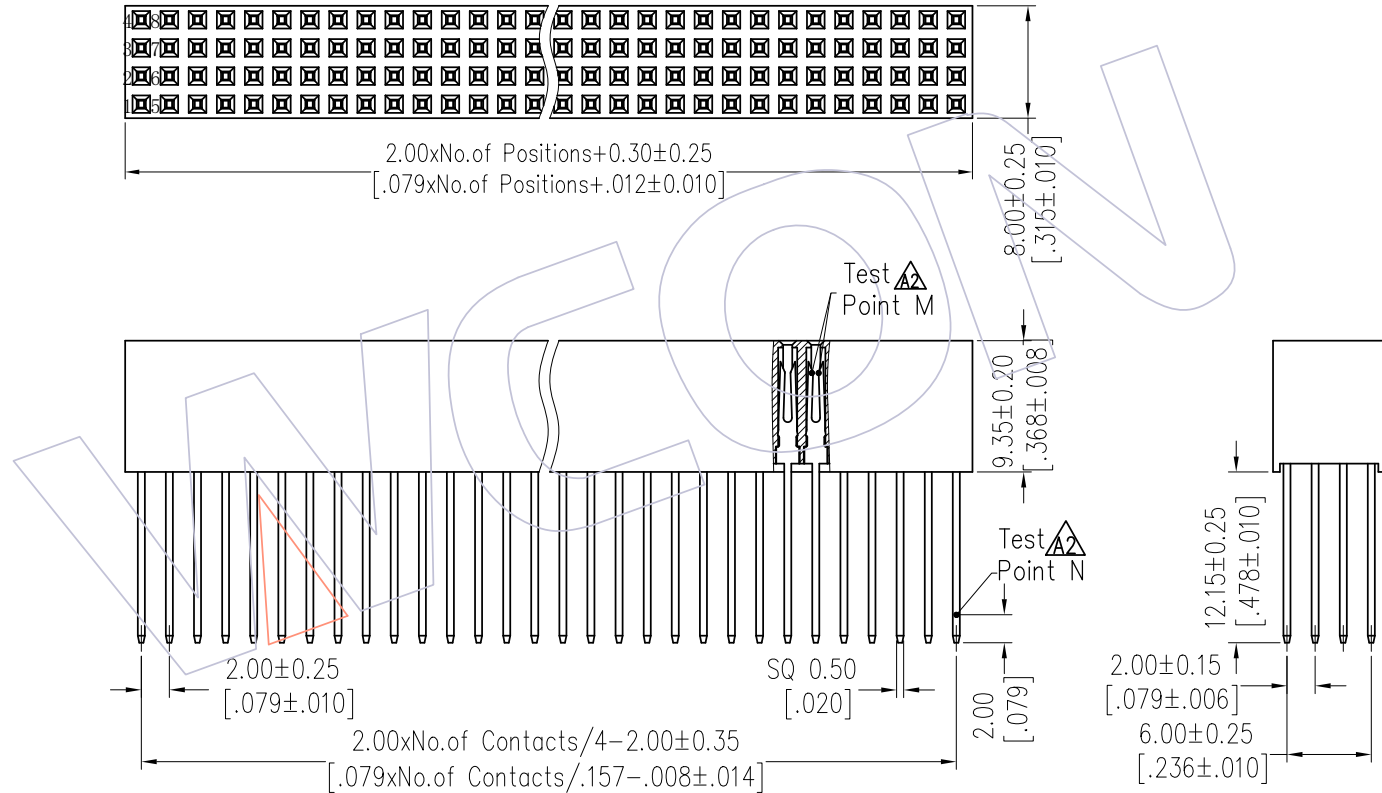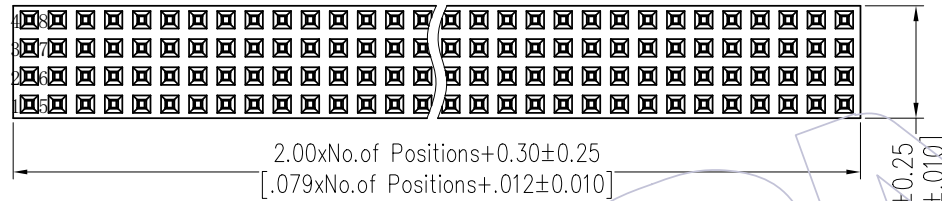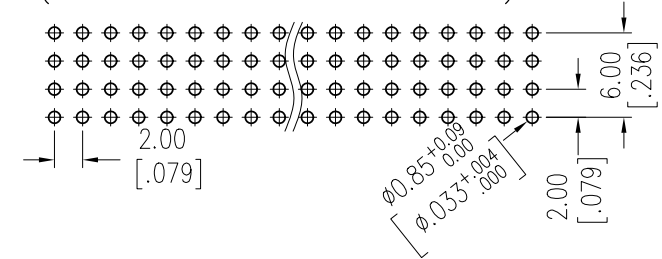

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2019/12/30	Modify drawing	-----	x.X ±0.40	XSR	2019/12/30	UNIT	mm	2293-4XXSXXYNX2
A1	2014/02/09	Modify drawing	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.00*2.00mm PC104 Plus FOUR ROW 180°DIP H=9.35 DIP=12.15
A0	2012/07/28	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com