

HSF






NOTES:
 Rated Current:0.5AMP
 Voltage rating:50V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:800MΩ min
 Operation Temperature:-25°C to +85°C

Contact:Phosphor Bronze,Tin-plated
 Solder Tdb:Phosphor Bronze,Tin-plated
 Housing:LCP+30%GF UL94V-0
 Slider:LCP+30%GF UL94V-0

Ordering Information

5134-XX R Z B F W T 01

No.of Pins 02-30P
 Contact Type B=Bottom contact
 Color A=Brown B=Black W=White E=Beige
 Packing T=Tube R=Reel

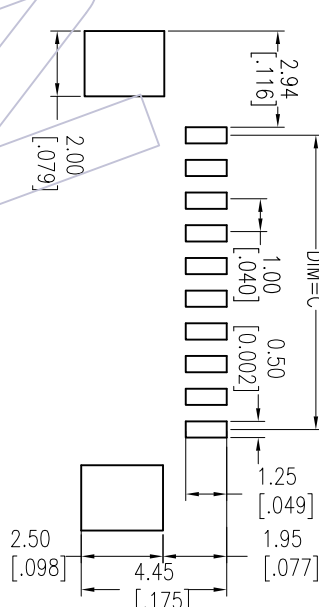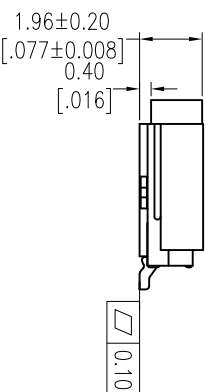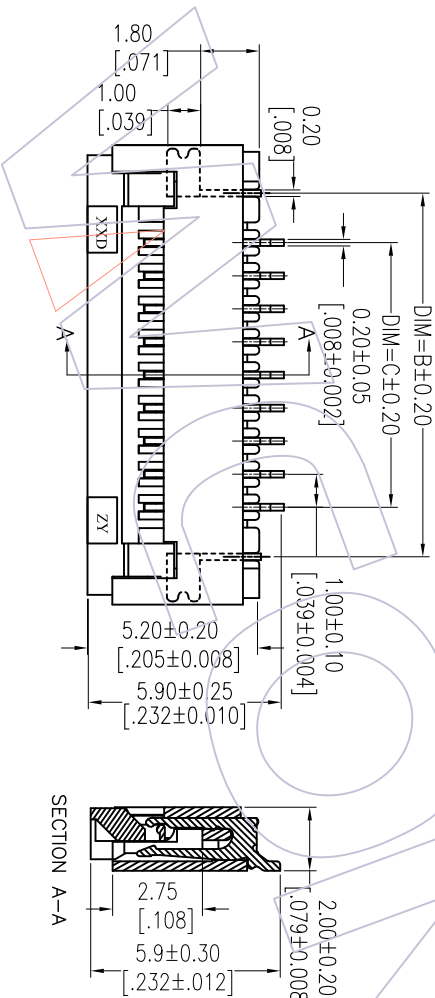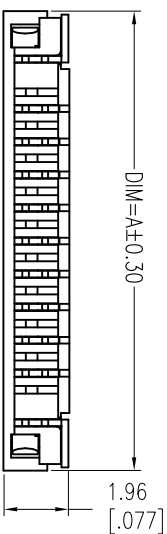

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

PIN	DIM=A	DIM=B	DIM=C	DIM=D	PIN	DIM=A	DIM=B	DIM=C	DIM=D
30P	34.9	32.00	29.00	31.10	16P	20.9	18.00	15.00	17.10
29P	33.9	31.00	28.00	30.10	14P	18.9	16.00	13.00	15.10
28P	32.9	30.00	27.00	29.10	13P	17.9	15.00	12.00	14.10
27P	31.9	29.00	26.00	28.10	12P	16.9	14.00	11.00	13.10
26P	30.9	28.00	25.00	27.10	11P	15.9	13.00	10.00	12.10
25P	29.9	27.00	24.00	26.10	10P	14.9	12.00	9.00	11.10
24P	28.9	26.00	23.00	25.10	9P	13.9	11.00	8.00	10.10
23P	27.9	25.00	22.00	24.10	8P	12.9	10.00	7.00	9.10
22P	26.9	24.00	21.00	23.10	7P	11.9	9.00	6.00	8.10
21P	25.9	23.00	20.00	22.10	6P	10.9	8.00	5.00	7.10
20P	24.9	22.00	19.00	21.10	5P	9.9	7.00	4.00	6.10
19P	23.9	21.00	18.00	20.10	4P	8.9	6.00	3.00	5.10
18P	22.9	20.00	17.00	19.10	3P	7.9	5.00	2.00	4.10
17P	21.9	19.00	16.00	18.10	2P	6.9	4.00	1.00	3.10

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
AO	2012/07/04	NEW		X.X	JYHuang	2012/07/04	UNIT	mm	5134-XXRZBFXX0X	1.00 PFC 90° SMT BOTTOM CONTACT	+86 769 85358920	+86 512 57468408
				X.XX	CHECK	DATE	SIZE	A4	#=2.0mm FRONT RAISE TYPE		+86 769 85358915	+86 512 57468468
				X.XXX	APPROVE	DATE	SHEET	1/1	Customer NO.		E-mail: sales@wcon.com	E-mail: sales@wcon.com
				Angle	PROU.							
				± 3'								
				TOL								

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com