

# HSF




NOTES:  
 Current Rating: 3.0A AMP  
 Contact Resistance: 20milliohm Max  
 Withstand Voltage: 1000V AC/Minute  
 Insulation Resistance: 10000Megohm Min  
 Operation Temperature: -40°C to +105°C

Housing Material: PA9T+30%GF Black(UL94V-0)  
 Contact Material: Brass  
 Contact plating: Au or Sn over Ni Plating

## Ordering Information

WF2548-2 WS XX X 0 1

Color: \_\_\_\_\_ Packing: \_\_\_\_\_  
 B:Black O=PE Bag  
 T=Tube

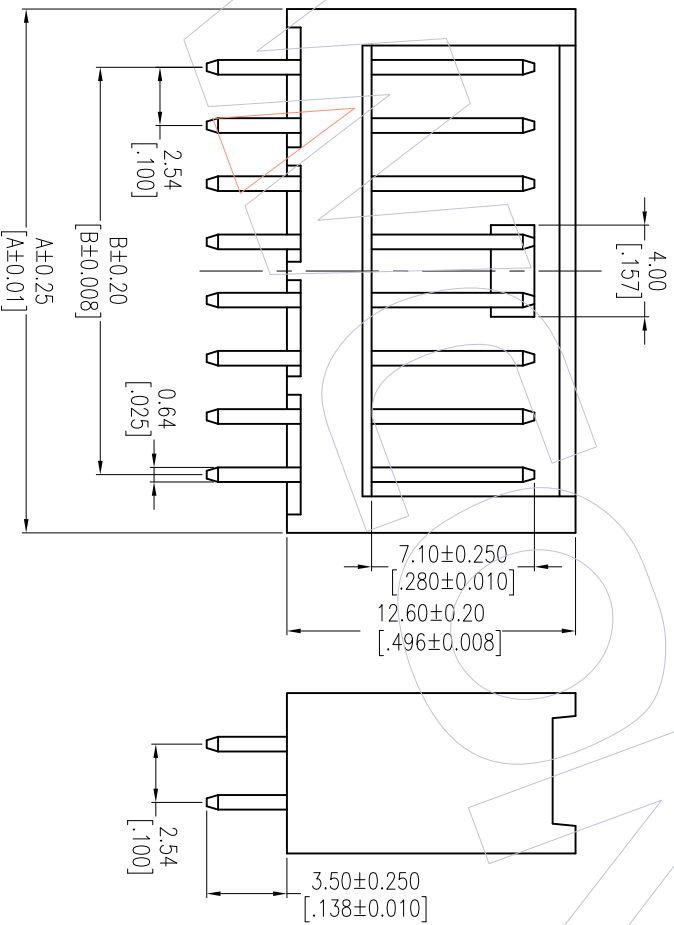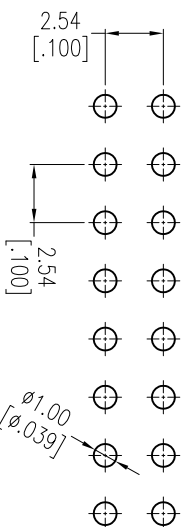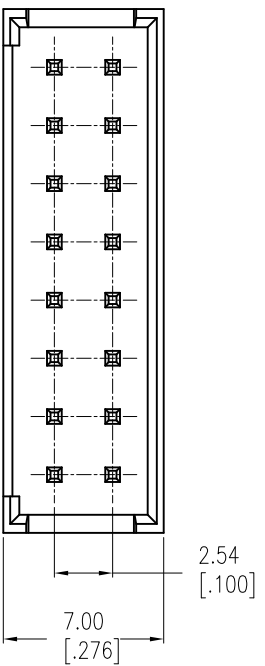

### Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2*4Pin	WF2548-2WS04X01	12.70[0.500]	7.62[0.300]
2*6Pin	WF2548-2WS06X01	17.78[0.700]	12.70[0.500]
2*8Pin	WF2548-2WS08X01	22.86[0.900]	17.78[0.700]
2*9Pin	WF2548-2WS09X01	25.40[1.000]	20.32[0.800]
2*12Pin	WF2548-2WS12X01	33.02[1.300]	27.94[1.100]
2*15Pin	WF2548-2W15X01	40.64[1.600]	35.56[1.400]
2*18Pin	WF2548-2WS18X01	48.26[1.900]	43.18[1.700]
2*22Pin	WF2548-2WS22X01	58.42[2.300]	53.34[2.100]

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2013.08.07	NEW	-

OPERATION	DRAW	DATE	SCALE
X.X	LKP	2013.08.07	1:1
X.XX	CHECK	DATE	UNIT
X.XXX	APPROVE	DATE	mm
Angle			inch
DIM	TOL		A4
			1/1

PART NO.	WF2548-2WSXXXB01
TITLE:	2.54mm DUAL ROW 180°DIP WAFER
CUSTOMER NO.	Customer NO.



WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com