


HSF


NOTES:

Rated Current:3.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25°C to +85°C


Insulator Material:PBT+30%G.F UL94V-0
 Use with:WF2542-T
 Mated With:WF2542-Wafer

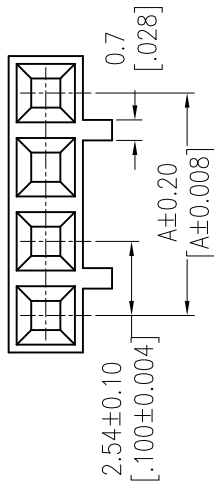

3PIN结构示意图

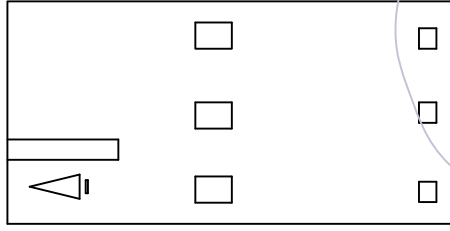

2PIN结构示意图

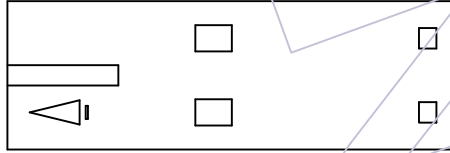

Dimensional & Ordering Information:

Circuit	Part No.	Dimension		Q'ty /Bog
		A	B	
02	WF2542-H02X02	2.54	5.08	1,000
03	WF2542-H03X02	5.08	7.62	1,000
04	WF2542-H04X02	7.62	10.16	1,000
05	WF2542-H05X02	10.16	12.70	1,000
06	WF2542-H06X02	12.70	15.24	1,000
07	WF2542-H07X02	15.24	17.78	1,000
08	WF2542-H08X02	17.78	20.32	1,000
09	WF2542-H09X02	20.32	22.86	1,000
10	WF2542-H10X02	22.86	25.40	1,000
11	WF2542-H11X02	25.40	27.94	1,000
12	WF2542-H12X02	27.94	30.48	1,000
13	WF2542-H13X02	30.48	33.02	1,000
14	WF2542-H14X02	33.02	35.56	1,000
15	WF2542-H15X02	35.56	38.10	1,000
16	WF2542-H16X02	38.10	40.64	1,000
17	WF2542-H17X02	40.64	43.18	1,000
18	WF2542-H18X02	43.18	45.72	1,000
19	WF2542-H19X02	45.72	48.26	1,000
20	WF2542-H20X02	48.26	50.80	1,000

Ordering Information

WF 2542 - H XX X 0 2

No. of pins
 02pin-20pin
 Color
 E=Beige
 W=White

4PIN以上

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SHEET	PROJ.	Customer NO.
A1	2013/05/02	增加2、3PIN结构示意图		X.X	±0.40	J/Huang	2013/05/02	SCALE	FIT	SEE TAB
A0	2012/09/07	NEW		X.XX	±0.25	CHECK	DATE	UNIT	mm	TITLE:
				X.XXX	±0.15	APPROVE	DATE	SIZE	A4	2.54mm CD-ROM WAFER HOUSING
				Angle	± .3°		DATE	SHEET	1/1	
								PROJ.	◆	

WCON

Http: www.wcon.com

WCON-Dongguan
 WCON-Kunshan
 Tel: +86 769 85358920
 Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: sales@wcon.com